



LINK N LIGHT 'PORTABLE'

Introducing our latest Product to the LINK N LIGHT Family is the LINK N LIGHT Portable. Same great lighting that is used underground but with a portable Power Supply Enclosure.

The benefits are

- Extra Low voltage 48VDC, minimising electrical hazards
- All plug and play
- Can run up to 45m of continuous light if needed
- Can be split to light different areas
- Easy to install and dismantle
- Heavy duty industrial led lighting

Areas of use

- Shutdowns in Draglines, Heavy Mobile Equipment and/or CHPP areas
- In or around wet areas where electricity can be a hazard
- As a temporary light in hard to reach areas.
- To light an entire area where more than one light is required

Link N light Portable comes in 5 or 15 metre lengths. It is supplied with one through cable to light the next light or route to another area. It can be supplied on recoverable reels if needed.




**SPECIALISING IN
INDUSTRIAL LED LIGHTING**

Unit 12/ 70
Connors Rd, Paget
Mackay QLD 4740
saes@eastwestlighting.com.au
www.eastwestlighting.com.au

P. (07) 4998 5613 ABN 77 600 375 399




LINK N LIGHT can be powered by a 150W (will power 15 metres) or a 600W (will power 45metres) Power Supply Enclosure. The PVC Power Supply Enclosure weights just over 10kg. it comes with a tool bag type shoulder strap, has a main isolator, power meter and outlet plug. All protection for the incoming and outgoing circuits are inside the enclosure.

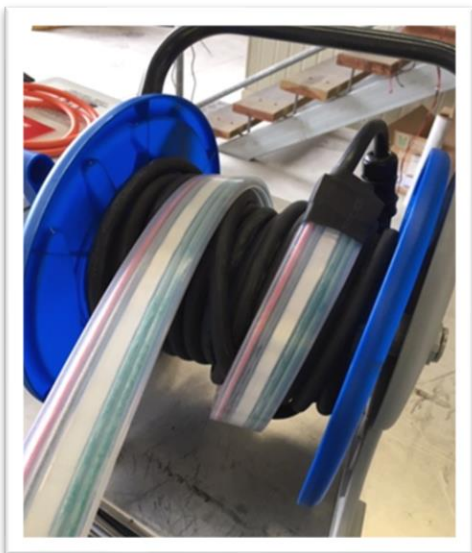



Accessories include magnetic clips, joiners, caps for plugs, reel for light, extension cables, and vertical hanging clamps.

Installation is as easy as tying or strapping the light up or using the magnetic clips (Sold separately) to place where needed. The light can be anchored if running vertical by the outside of the light using the optional clamp.

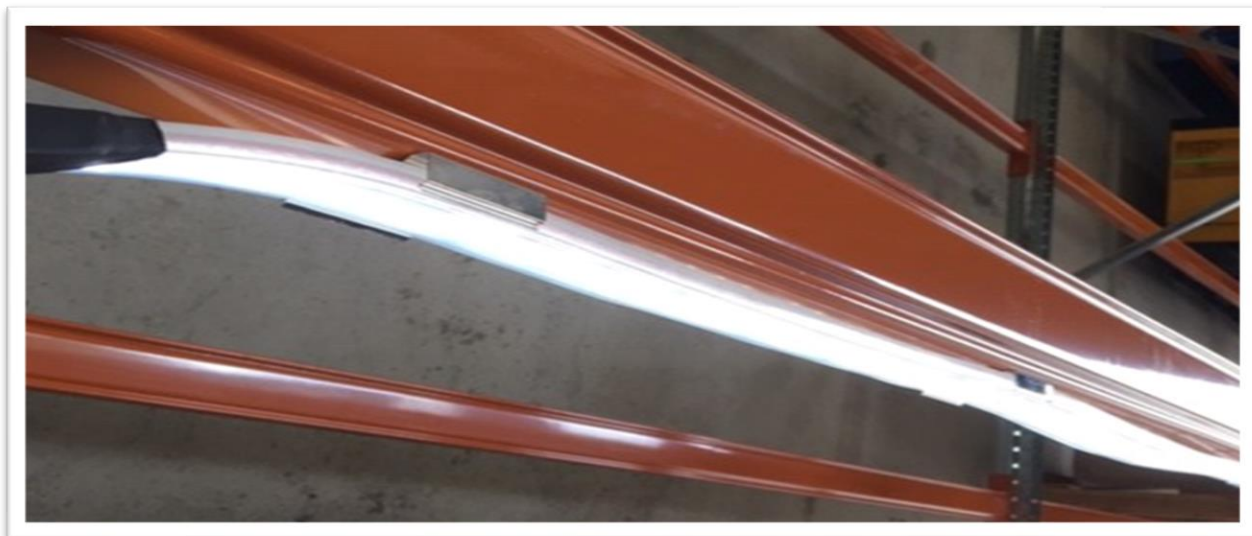

Power Supply Specs

IP Rating	IP66
Input	100-240V AC (240V plug fitted)
Output	48VDC (set at 49VDC from manufacture)
Protection	Double pole CB on primary. Double pole CB and HRC Fuse on secondary
Primary power draw	<2A for 45 Metres of Link N Light. Approx. 450W
Weight	10.5kg
Extension Cable	2C Rubber cable rated to 1000vdc

Light Specs

IP Rating	IP66 (Light is IP67, Plugs IP66)
Input	48VDC
Weight	<1kg per Meter
Light output in lux at distances specified.	3m – 167 lux 4m – 98 lux 5m – 73 lux 6m – 56 lux
Length	5m 15m
Colours Available	White Red Blue Green Yellow

For more information or sales contact Lance Walk lance@eastwestelectrical.com.au
0428848515 or sales@eastwestelectrical.com.au